MULTI-1 DRILLS

CDRA03 SERIES

HSS-PM, MULTI-1 DRILLS

STUB

HSS-PM MULTI-1 BOHRER
Forets MULTI-1 HSS-PM Premium, série extra-courte
PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

▶**Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.

▶**Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.


▶**Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

▶**Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.





up to 1.4mm over 1.4mm

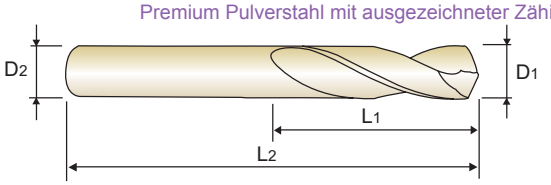

HSS PM | 30° | h6 | h7 | 118° | 135° | TiAlN

p.A169

Recommended ToolHolder | Plain Shank | HYDRAULIC CHUCK

up to 1.9mm over 1.9mm

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D_1	D_2	L_1	L_2
CDRA03010	1.0	3	6	38
CDRA03011	1.1	3	7	39
CDRA03012	1.2	3	8	40
CDRA03013	1.3	3	8	40
CDRA03014	1.4	3	9	41
CDRA03015	1.5	3	9	41
CDRA03016	1.6	3	10	42
CDRA03017	1.7	3	10	42
CDRA03018	1.8	3	11	43
CDRA03019	1.9	3	11	43
CDRA03020	2.0	3	12	44
CDRA03021	2.1	3	12	44
CDRA03022	2.2	3	13	45
CDRA03023	2.3	3	13	45
CDRA03024	2.4	3	14	46
CDRA03025	2.5	3	14	46
CDRA03026	2.6	3	14	46
CDRA03027	2.7	3	16	48
CDRA03028	2.8	3	16	48
CDRA03029	2.9	3	16	48
CDRA03030	3.0	3	16	48
CDRA03031	3.1	4	18	50
CDRA03032	3.2	4	18	50
CDRA03033	3.3	4	18	50

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D_1	D_2	L_1	L_2
CDRA03034	3.4	4	20	52
CDRA03035	3.5	4	20	52
CDRA03036	3.6	4	20	52
CDRA03037	3.7	4	20	52
CDRA03038	3.8	4	22	54
CDRA03039	3.9	4	22	54
CDRA03040	4.0	4	22	54
CDRA03041	4.1	6	22	66
CDRA03042	4.2	6	22	66
CDRA03043	4.3	6	24	68
CDRA03044	4.4	6	24	68
CDRA03045	4.5	6	24	68
CDRA03046	4.6	6	24	68
CDRA03047	4.7	6	24	68
CDRA03048	4.8	6	26	70
CDRA03049	4.9	6	26	70
CDRA03050	5.0	6	26	70
CDRA03051	5.1	6	26	70
CDRA03052	5.2	6	26	70
CDRA03053	5.3	6	26	70
CDRA03054	5.4	6	28	72
CDRA03055	5.5	6	28	72
CDRA03056	5.6	6	28	72
CDRA03057	5.7	6	28	72

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○			◎	○	○	○			○		◎	○					

ISO	N										S					H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○												○					

MULTI-1 DRILLS

CDRA03 SERIES

HSS-PM, MULTI-1 DRILLS

STUB

HSS-PM MULTI-1 BOHRER
Forets MULTI-1 HSS-PM Premium, série extra-courte
PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

▶**Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.

▶**Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.


▶**Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

▶**Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.





up to 1.4mm over 1.4mm

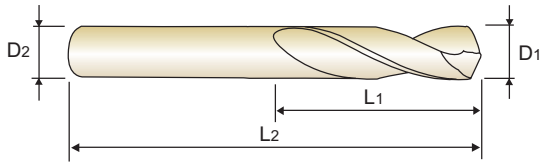

HSS PM | 30° | h6 | h7 | 118° | 135° | TiAlN | up to 1.9mm over 1.9mm

p.A169

Recommended ToolHolder | Plain Shank | HYDRAULIC CHUCK

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
CDRA03058	5.8	6	28	72
CDRA03059	5.9	6	28	72
CDRA03060	6.0	6	28	72
CDRA03061	6.1	8	31	75
CDRA03062	6.2	8	31	75
CDRA03063	6.3	8	31	75
CDRA03064	6.4	8	31	75
CDRA03065	6.5	8	31	75
CDRA03066	6.6	8	31	75
CDRA03067	6.7	8	31	75
CDRA03068	6.8	8	34	78
CDRA03069	6.9	8	34	78
CDRA03070	7.0	8	34	78
CDRA03071	7.1	8	34	78
CDRA03072	7.2	8	34	78
CDRA03073	7.3	8	34	78
CDRA03074	7.4	8	34	78
CDRA03075	7.5	8	34	78
CDRA03076	7.6	8	37	81
CDRA03077	7.7	8	37	81
CDRA03078	7.8	8	37	81
CDRA03079	7.9	8	37	81
CDRA03080	8.0	8	37	81
CDRA03081	8.1	10	37	87

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
CDRA03082	8.2	10	37	87
CDRA03083	8.3	10	37	87
CDRA03084	8.4	10	37	87
CDRA03085	8.5	10	37	87
CDRA03086	8.6	10	40	90
CDRA03087	8.7	10	40	90
CDRA03088	8.8	10	40	90
CDRA03089	8.9	10	40	90
CDRA03090	9.0	10	40	90
CDRA03091	9.1	10	40	90
CDRA03092	9.2	10	40	90
CDRA03093	9.3	10	40	90
CDRA03094	9.4	10	40	90
CDRA03095	9.5	10	40	90
CDRA03096	9.6	10	43	93
CDRA03097	9.7	10	43	93
CDRA03098	9.8	10	43	93
CDRA03099	9.9	10	43	93
CDRA03100	10.0	10	43	93
CDRA03101	10.1	12	43	100
CDRA03102	10.2	12	43	100
CDRA03103	10.3	12	43	100
CDRA03104	10.4	12	43	100
CDRA03105	10.5	12	43	100

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○			◎	○	○	○			○		◎	○					

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	○	○												○					

MULTI-1 DRILLS

CDRA03 SERIES

HSS-PM, MULTI-1 DRILLS

STUB

HSS-PM MULTI-1 BOHRER
Forets MULTI-1 HSS-PM Premium, série extra-courte
PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

▶**Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.

▶**Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.


▶**Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

▶**Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.





up to 1.4mm over 1.4mm

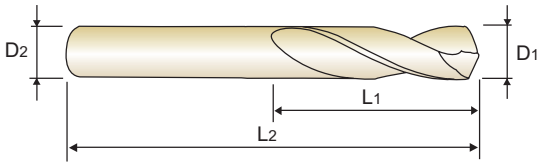

HSS PM | 30° | h6 | h7 | 118° | 135° | TiAlN

p.A169

Recommended ToolHolder | Plain Shank | HYDRAULIC CHUCK

up to 1.9mm over 1.9mm

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D_1	D_2	L_1	L_2
CDRA03106	10.6	12	43	100
CDRA03107	10.7	12	47	104
CDRA03108	10.8	12	47	104
CDRA03109	10.9	12	47	104
CDRA03110	11.0	12	47	104
CDRA03111	11.1	12	47	104
CDRA03112	11.2	12	47	104
CDRA03113	11.3	12	47	104
CDRA03114	11.4	12	47	104
CDRA03115	11.5	12	47	104
CDRA03116	11.6	12	47	104
CDRA03117	11.7	12	47	104
CDRA03118	11.8	12	47	104
CDRA03119	11.9	12	51	108
CDRA03120	12.0	12	51	108
CDRA03121	12.1	12	51	108
CDRA03122	12.2	12	51	108
CDRA03123	12.3	12	51	108
CDRA03124	12.4	12	51	108
CDRA03125	12.5	12	51	108

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D_1	D_2	L_1	L_2
CDRA03126	12.6	12	51	108
CDRA03127	12.7	12	51	108
CDRA03128	12.8	12	51	108
CDRA03129	12.9	12	51	108
CDRA03130	13.0	12	51	108

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○			◎	○	○	○			○		◎	○					

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○												○					