MULTI-1 DRILLS

CDRA04 SERIES

HSS-PM, MULTI-1 DRILLS

JOBBER

HSS-PM MULTI-1 BOHRER — *KURZ*
Forets MULTI-1 HSS-PM Premium, série courte — *COURTE*
PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM — *CORTA*

▶**Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.


▶**Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

▶**Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

▶**Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.





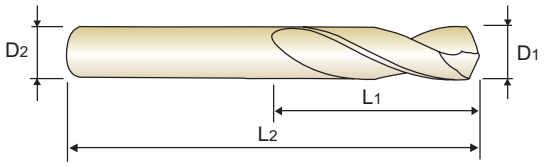

HSS PM | 30° | h6 | h7 | 135° | TiAlN

p.A169

Recommended ToolHolder — Plain Shank / HYDRAULIC CHUCK

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
CDRA04020	2.0	3	24	56
CDRA04021	2.1	3	24	56
CDRA04022	2.2	3	25	56
CDRA04023	2.3	3	25	56
CDRA04024	2.4	3	30	61
CDRA04025	2.5	3	30	61
CDRA04026	2.6	3	30	61
CDRA04027	2.7	3	33	64
CDRA04028	2.8	3	33	64
CDRA04029	2.9	3	33	64
CDRA04030	3.0	3	33	64
CDRA04031	3.1	4	36	68
CDRA04032	3.2	4	36	68
CDRA04033	3.3	4	36	68
CDRA04034	3.4	4	39	71
CDRA04035	3.5	4	39	71
CDRA04036	3.6	4	39	71
CDRA04037	3.7	4	39	71
CDRA04038	3.8	4	43	75
CDRA04039	3.9	4	43	75
CDRA04040	4.0	4	43	75
CDRA04041	4.1	6	43	85
CDRA04042	4.2	6	43	85
CDRA04043	4.3	6	47	89

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
CDRA04044	4.4	6	47	89
CDRA04045	4.5	6	47	89
CDRA04046	4.6	6	47	89
CDRA04047	4.7	6	47	89
CDRA04048	4.8	6	52	94
CDRA04049	4.9	6	52	94
CDRA04050	5.0	6	52	94
CDRA04051	5.1	6	52	94
CDRA04052	5.2	6	52	94
CDRA04053	5.3	6	52	94
CDRA04054	5.4	6	57	99
CDRA04055	5.5	6	57	99
CDRA04056	5.6	6	57	99
CDRA04057	5.7	6	57	99
CDRA04058	5.8	6	57	99
CDRA04059	5.9	6	57	99
CDRA04060	6.0	6	57	99
CDRA04061	6.1	8	63	107
CDRA04062	6.2	8	63	107
CDRA04063	6.3	8	63	107
CDRA04064	6.4	8	63	107
CDRA04065	6.5	8	63	107
CDRA04066	6.6	8	63	107
CDRA04067	6.7	8	63	107

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○			◎	○	○	○			○		◎	○					

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	○	○												○					

HSS-PM, MULTI-1 DRILLS

JOBBER

KURZ

COURTE

CORTA

HSS-PM MULTI-1 BOHRER

Forets MULTI-1 HSS-PM Premium, série courte

PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM

▶**Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.


▶**Advantage** : Point shape to maximize self-centering. Flute design for the best chip evacuation. Premium powder materials with excellent toughness.

▶**Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

▶**Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff. Bohrergeometrie für optimale Spanabfuhr. Premium Pulverstahl mit ausgezeichneter Zähigkeit.





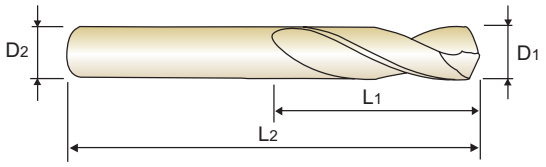

HSS PM | 30° | h6 | h7 | 135° | TiAlN

p.A169

Recommended ToolHolder — Plain Shank — HYDRAULIC CHUCK

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D_1	D_2	L_1	L_2
CDRA04068	6.8	8	69	113
CDRA04069	6.9	8	69	113
CDRA04070	7.0	8	69	113
CDRA04071	7.1	8	69	113
CDRA04072	7.2	8	69	113
CDRA04073	7.3	8	69	113
CDRA04074	7.4	8	69	113
CDRA04075	7.5	8	69	113
CDRA04076	7.6	8	75	119
CDRA04077	7.7	8	75	119
CDRA04078	7.8	8	75	119
CDRA04079	7.9	8	75	119
CDRA04080	8.0	8	75	119
CDRA04081	8.1	10	75	125
CDRA04082	8.2	10	75	125
CDRA04083	8.3	10	75	125
CDRA04084	8.4	10	75	125
CDRA04085	8.5	10	75	125
CDRA04086	8.6	10	81	131
CDRA04087	8.7	10	81	131
CDRA04088	8.8	10	81	131
CDRA04089	8.9	10	81	131
CDRA04090	9.0	10	81	131
CDRA04091	9.1	10	81	131

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D_1	D_2	L_1	L_2
CDRA04092	9.2	10	81	131
CDRA04093	9.3	10	81	131
CDRA04094	9.4	10	81	131
CDRA04095	9.5	10	81	131
CDRA04096	9.6	10	87	137
CDRA04097	9.7	10	87	137
CDRA04098	9.8	10	87	137
CDRA04099	9.9	10	87	137
CDRA04100	10.0	10	87	137
CDRA04101	10.1	12	87	144
CDRA04102	10.2	12	87	144
CDRA04103	10.3	12	87	144
CDRA04104	10.4	12	87	144
CDRA04105	10.5	12	87	144
CDRA04106	10.6	12	87	144
CDRA04107	10.7	12	94	151
CDRA04108	10.8	12	94	151
CDRA04109	10.9	12	94	151
CDRA04110	11.0	12	94	151
CDRA04111	11.1	12	94	151
CDRA04112	11.2	12	94	151
CDRA04113	11.3	12	94	151
CDRA04114	11.4	12	94	151
CDRA04115	11.5	12	94	151

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○			◎	○	○	○			○		◎	○					

ISO	N										S					H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	○	○												○					

MULTI-1 DRILLS

CDRA04 SERIES

HSS-PM, MULTI-1 DRILLS

JOBBER

HSS-PM MULTI-1 BOHRER — *KURZ*
Forets MULTI-1 HSS-PM Premium, série courte — *COURTE*
PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM — *CORTA*

▶**Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.


▶**Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

▶**Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

▶**Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.





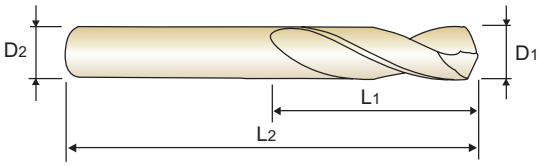

HSS PM | 30° | h6 | h7 | 135° | TiAlN

p.A169

Recommended ToolHolder — Plain Shank / HYDRAULIC CHUCK

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D_1	D_2	L_1	L_2
CDRA04116	**11.6**	12	94	151
CDRA04117	**11.7**	12	94	151
CDRA04118	**11.8**	12	94	151
CDRA04119	**11.9**	12	101	158
CDRA04120	**12.0**	12	101	158
CDRA04121	**12.1**	12	101	158
CDRA04122	**12.2**	12	101	158
CDRA04123	**12.3**	12	101	158

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D_1	D_2	L_1	L_2
CDRA04124	**12.4**	12	101	158
CDRA04125	**12.5**	12	101	158
CDRA04126	**12.6**	12	101	158
CDRA04127	**12.7**	12	101	158
CDRA04128	**12.8**	12	101	158
CDRA04129	**12.9**	12	101	158
CDRA04130	**13.0**	12	101	158

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○			◎	○	○	○			○		◎	○					

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	○	○												○					

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions
YG-1 CO., LTD.