CARBIDE, 2 FLUTE 30° HELIX SHORT LENGTH

▶ Designed for general purposes to carbon steels, tool steels, alloy steels, and stainless steels.
▶ Suitable for high speed machining in wet or dry condition.





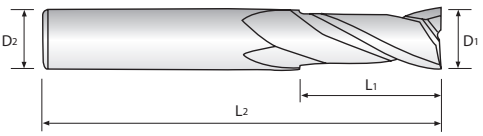



p.51

Mill Dia.Tolerance (mm)	Shank Dia.Tolerance
0 ~ - 0.030	h6

G9F41 SERIES

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D_1	D_2	L_1	L_2
G9F41010N	1.0	4	3	50
G9F41999N	1.5	4	4	50
G9F41020N	2.0	4	6	50
G9F41998N	2.5	4	8	50
G9F41030N	3.0	4	8	50
G9F41997N	3.5	4	10	50
G9F41040N	4.0	4	11	50
G9F41996N	4.5	4.5	12	50
G9F41050N	5.0	6	13	50
G9F41995N	5.5	5.5	15	50
G9F41060N	6.0	6	16	50
G9F41994N	7.0	7	20	60
G9F41080N	8.0	8	20	60
G9F41993N	9.0	9	20	60
G9F41100N	10.0	10	25	75
G9F41120N	12.0	12	32	75
G9F41140N	14.0	14	32	75
G9F41160N	16.0	16	32	75
G9F41200N	20.0	20	32	100