CARBIDE, 2 FLUTE 30° HELIX

▶ Designed for general purposes to carbon steels, tool steels, alloy steels, and stainless steels.
▶ Suitable for high speed machining in wet or dry condition.





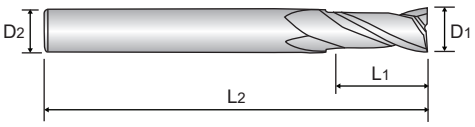



p.51

Mill Dia.Tolerance (mm)	Shank Dia.Tolerance
0 ~ - 0.030	h6

G9J54 SERIES

Unit : mm

EDP No.	Mill Diameter	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
G9J54999N	R1.5	**3.0**	3	10	75
G9J54998N	R2.0	**4.0**	4	12	75
G9J54997N	R2.5	**5.0**	5	20	75
G9J54996N	R3.0	**6.0**	6	20	75
G9J54995N	R4.0	**8.0**	8	25	75
G9J54994N	R5.0	**10.0**	10	40	100
G9J54993N	R6.0	**12.0**	12	45	100