CARBIDE, 6 FLUTE 45° HELIX

▶ High speed cutting and finish milling with high feed rate.
▶ Excellent surface finishes.
▶ Application in high speed machining, wet and dry cutting condition.





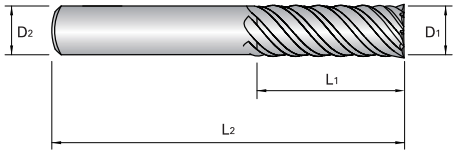

CARBIDE | 6 | 45° | PLAIN | X Coating

p.57



Enforced Cutting Edge

Mill Dia.Tolerance (mm)	Shank Dia.Tolerance
0 ~ - 0.030	h5

G9J58 SERIES

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
G9J58999N	6.0	6	15	50
G9J58998N	8.0	8	20	60
G9J58997N	10.0	10	25	75
G9J58996N	12.0	12	30	75
G9J58995N	16.0	16	40	100