END MILLS for HARDENED MATERIAL


NEW CENTURY

CARBIDE, 4 FLUTE CORNER RADIUS

▶ Designed for machining high-hardened materials, dry cutting, and high-speed cutting.
▶ Consistently delivers an exceptional workpiece finish and boasts high wear resistance.





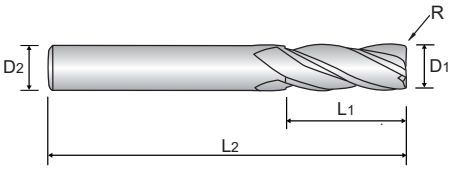

CARBIDE | 4 | 30° | R ±0.010 | PLAIN | Z-VG Coating

p. 77

Size	Mill Dia.Tolerance (mm)	Shank Dia.Tolerance
up to Ø6	0 ~ - 0.012	h5
over Ø6	0 ~ - 0.015	

GFJ70 SERIES

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
GFJ7006005	R0.5	**6.0**	6	15	90
GFJ7006010	R1.0	**6.0**	6	15	90
GFJ7008005	R0.5	**8.0**	8	20	100
GFJ7008010	R1.0	**8.0**	8	20	100
GFJ7010005	R0.5	**10.0**	10	25	100
GFJ7010010	R1.0	**10.0**	10	25	100
GFJ7010020	R2.0	**10.0**	10	25	100
GFJ7012005	R0.5	**12.0**	12	30	110
GFJ7012010	R1.0	**12.0**	12	30	110
GFJ7012020	R2.0	**12.0**	12	30	110

· Phone: +82-32-526-0909, www.yg1.solutions, E-mail: yg1@yg1.solutions