

CARBIDE, 2 FLUTE STUB LENGTH

▶ Designed for machining high-hardened materials, dry cutting, and high-speed cutting.
▶ Consistently delivers an exceptional workpiece finish and boasts high wear resistance.







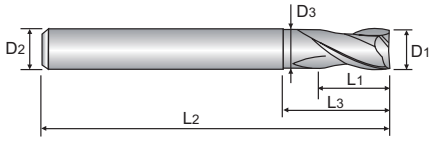

p. 80~81

Size	Mill Dia.Tolerance (mm)	Shank Dia.Tolerance
up to Ø6	0 ~ - 0.012	h5
over Ø6	0 ~ - 0.015	

GFJ72 SERIES

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
GFJ72004	0.4	4	0.8	-	40	-
GFJ72005	0.5	4	1	-	40	-
GFJ72006	0.6	4	1.2	-	40	-
GFJ72007	0.7	4	1.4	-	40	-
GFJ72008	0.8	4	1.6	-	40	-
GFJ72009	0.9	4	2	-	40	-
GFJ72010	1.0	6	1.5	3	50	0.95
GFJ72015	1.5	6	1.7	4	50	1.45
GFJ72020	2.0	6	2	5	50	1.95
GFJ72025	2.5	6	2.5	6	55	2.4
GFJ72030	3.0	6	3	8	55	2.85
GFJ72035	3.5	6	3.5	9	55	3.35
GFJ72040	4.0	6	4	10	55	3.85
GFJ72050	5.0	6	5	13	55	4.85
GFJ72060	6.0	6	6	15	55	5.85
GFJ72080	8.0	8	8	20	65	7.7
GFJ72100	10.0	10	10	25	75	9.7
GFJ72120	12.0	12	12	28	85	11.7
GFJ72160	16.0	16	16	32	90	15.7
GFJ72200	20.0	20	20	40	105	19.7