END MILLS for HARDENED MATERIAL

NEW CENTURY

CARBIDE, 4 FLUTE STUB LENGTH

- Designed for machining high-hardened materials, dry cutting, and high-speed cutting.
- Consistently delivers an exceptional workpiece finish and boasts high wear resistance.





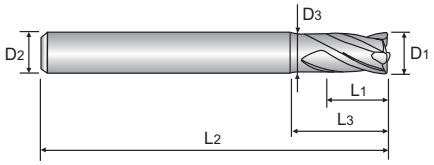

CARBIDE | 4 | 30° | PLAIN | Z-VG Coating

p. 82



Enforced Cutting Edge

Size	Mill Dia.Tolerance (mm)	Shank Dia.Tolerance
up to Ø6	0 ~ - 0.012	h5
over Ø6	0 ~ - 0.015	

GFJ73 SERIES

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
GFJ73010	1.0	6	1.5	3	50	0.95
GFJ73020	2.0	6	2	5	50	1.95
GFJ73030	3.0	6	3	8	55	2.85
GFJ73040	4.0	6	4	10	55	3.85
GFJ73050	5.0	6	5	13	55	4.85
GFJ73060	6.0	6	6	15	55	5.85
GFJ73080	8.0	8	8	20	65	7.7
GFJ73100	10.0	10	10	25	75	9.7
GFJ73120	12.0	12	12	28	85	11.7
GFJ73160	16.0	16	16	32	90	15.7
GFJ73200	20.0	20	20	40	105	19.7

· Phone: +82-32-526-0909, www.yg1.solutions, E-mail: yg1@yg1.solutions