REAMERS

K2121 SERIES

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - LH SPIRAL FLUTES (QUICK SPIRAL)

HSS-E, MASCHINEN - SCHÄLREIBAHLE mit ZYLINDERSCHAFT - SPIRALGENUTET mit LINKSDRAL
ALÉSOIRS HSS-E MACHINE DROIT- HÉLICE À GAUCHE (HÉLICE RAPIDE)
ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA RAPIDA, SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ Chamfer Angle - tapered
- ▶ LH High Spiral Flutes / Right Hand Cut

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Anschnittwinkel - Konisch
- ▶ Spiralgenutet mit Linksdrall / Rechtsschneidend



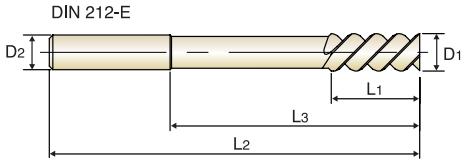

Hole type

HSS-E | DIN 212 | H7 | LH45° | FORM E | Bright

p.A406

Recommended ToolHolder — Plain Shank — ER COLLET CHUCK

Unit : mm

EDP No.	Reamer Diameter D1	Shank Diameter D2	Cutting Length L1	Neck Length L3	Overall Length L2	No. of Flute
K212100400	4.0	4	19	42	75	3
K212100450	4.5	4.5	21	46	80	3
K212100500	5.0	5	23	51	86	3
K212100550	5.5	5.6	26	56	93	3
K212100600	6.0	5.6	26	56	93	3
K212100650	6.5	6.3	28	62	101	3
K212100700	7.0	7.1	31	68	109	3
K212100800	8.0	8	33	74	117	3
K212100850	8.5	8	33	74	117	3
K212100900	9.0	9	36	80	125	3
K212100950	9.5	9	36	80	125	3
K212101000	10.0	10	38	86	133	3
K212101100	11.0	10	41	95	142	3
K212101200	12.0	10	44	104	151	3
K212101300	13.0	10	44	104	151	3
K212101400	14.0	12.5	47	108	160	4
K212101500	15.0	12.5	50	110	162	4
K212101600	16.0	12.5	52	118	170	4
K212101700	17.0	14	54	121	175	4
K212101800	18.0	14	56	128	182	4
K212101900	19.0	16	58	129	189	4
K212102000	20.0	16	60	135	195	4

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○				○														

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎		◎	◎	◎													

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions
YG-1 CO., LTD.

YG REAMERS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

K2101, K2111, K21B1, K2102, K2112 SERIES

HSS-E, STRAIGHT & LH SPIRAL FLUTE CHUCKING REAMERS
HSS-E, NC MACHINE REAMERS

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Feed														
				2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	45.0	50.0
P	1	Non-alloy steel	14	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	2		14	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	3		10	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	4		8	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	6	Low alloy steel	12	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	7		8	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	10	High alloyed steel, and tool steel	6	0.03-0.04	0.04-0.05	0.05-0.06	0.06-0.07	0.07-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20	0.20-0.22	0.22-0.24	0.24-0.26	0.26-0.28	0.28-0.30
M	12	Stainless steel	6	0.03-0.04	0.04-0.05	0.05-0.06	0.06-0.07	0.07-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20	0.20-0.22	0.22-0.24	0.24-0.26	0.26-0.28	0.28-0.30
	13		5	0.03-0.04	0.04-0.05	0.05-0.06	0.06-0.07	0.07-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20	0.20-0.22	0.22-0.24	0.24-0.26	0.26-0.28	0.28-0.30
	14		4	0.03-0.04	0.04-0.05	0.05-0.06	0.06-0.07	0.07-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20	0.20-0.22	0.22-0.24	0.24-0.26	0.26-0.28	0.28-0.30
K	15	Grey cast iron	14	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	16		11	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	17	Nodular cast iron	12	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	18		10	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	19	Malleable cast iron	12	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	20		10	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
N	21	Aluminum-wrought alloy	18	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	22		18	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	23	Aluminum-cast, alloyed	18	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	24		17	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	26	Copper and Copper Alloys (Bronze / Brass)	18	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	27		16	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	28		20	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60

K2121 SERIES

HSS-E, CHUCKING REAMERS - QUICK SPIRAL

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Feed							
				2.0	4.0	8.0	10.0	12.0	14.0	16.0	20.0
P	1	Non-alloy steel	18	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	2		16	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	6	Low alloy steel	14	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
N	21	Aluminum-wrought alloy	20	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	22		20	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	23	Aluminum-cast, alloyed	20	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	24		18	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	26	Copper and Copper Alloys (Bronze / Brass)	19	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	27		18	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	28		20	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60