i - ONE DRILLS

Y141H SERIES

i-ONE DRILL INSERTS & HOLDERS

i-ONE DRILL EINSÄTZE UND HALTER
PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL
INSERTI & PORTAINSERTI i-ONE DRILL

- Applications
▶For carbon steels, alloy steels and cast iron.
▶Holder length: 3xD, 5xD, 8xD
- Benefits
▶Secure and quick clamping system.
▶High performance with cost efficiency.
▶Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
▶Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
▶Halterlänge: 3xD, 5xD, 8xD
- Vorteile
▶Sicheres und schnelles Spannsystem.
▶Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
▶Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

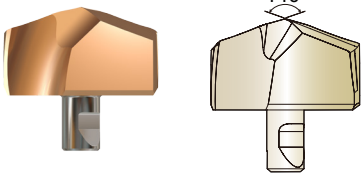

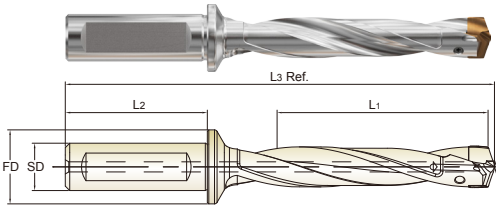

CARBIDE | ISO 9766 | h7 | 140° | H Coating

p.A34

Recommended ToolHolder: Flat Shank — INDEXABLE DRILL HOLDER — ER COLLET CHUCK

Unit : mm

Series Range	Insert EDP No.	Insert O.D. h7			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	Screw No.
(mm)	H-Coating	dec.	frac.	mm		SD	L2	FD	L1		L3 Ref.	
S14 Ø14.00 to Ø15.99	Y141H1400	0.5512	-	14.00	ZD14003016	16	48	23	3D	43.5	116.3	TX1415P7
	Y141H1410	0.5551	-	14.10								
	Y141H1420	0.5591	-	14.20	ZD14005016				5D	72.5	144.3	
	Y141H1429	0.5625	9/16	14.29								
	Y141H1430	0.5630	-	14.30	ZD14008016				8D	116.0	186.3	
	Y141H1440	0.5669	-	14.40								
	Y141H1450	0.5709	-	14.50	ZD14503016	16	48	23	3D	45.0	118.3	
	Y141H1460	0.5748	-	14.60								
	Y141H1468	0.5781	37/64	14.68	ZD14505016				5D	75.0	147.3	
	Y141H1470	0.5787	-	14.70								
	Y141H1480	0.5827	-	14.80	ZD14508016				8D	120.0	190.8	
	Y141H1490	0.5866	-	14.90								
	Y141H1500	0.5906	-	15.00	ZD15003016	16	48	23	3D	46.5	120.3	
	Y141H1508	0.5938	19/32	15.08								
	Y141H1510	0.5945	-	15.10	ZD15005016				5D	77.5	150.3	
	Y141H1520	0.5984	-	15.20								
	Y141H1530	0.6024	-	15.30	ZD15008016				8D	124.0	195.3	
	Y141H1540	0.6063	-	15.40								
	Y141H1548	0.6094	39/64	15.48								
	Y141H1550	0.6102	-	15.50	ZD15503016	16	48	23	3D	48.0	121.3	
	Y141H1560	0.6142	-	15.60								
	Y141H1570	0.6181	-	15.70	ZD15505016				5D	80.0	152.3	
	Y141H1580	0.6220	-	15.80								
	Y141H1588	0.6250	5/8	15.88	ZD15508016				8D	128.0	198.8	
	Y141H1590	0.6260	-	15.90								

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P											M				K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Duplex	Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14		15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎					◎	◎	◎	◎	◎	◎

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions
YG-1 CO., LTD.