



Leading Through Innovation



**CARBIDE, HSS & HSS-E**

# REAMERS

REIBAHLEN

- Carbide NC Machine Reamers  
HSS Hand Reamers, HSS-E Chucking Reamers
- Hartmetall NC Maschinenreibahlen  
HSS-Handreibahlen, HSS-E Spannfutter-Reibahlen

SERIES	K4101	K4111
HOLETYPE		
FLUTETYPE	<b>Straight</b>	<b>LH Spiral</b>
SIZE MIN	D2.0	D2.0
SIZE MAX	D20.0	D20.0
PAGE	<b>406</b>	<b>407</b>

SURFACE TREATMENT

Bright

# CARBIDE, HSS & HSS-E REAMERS

Carbide NC Machine Reamers  
HSS Hand Reamers  
HSS-E Chucking Reamers

◎ : Excellent ○ : Good

Recommended cutting conditions : P.427



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	K4101	K4111
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎
	4		About 0.75% C Annealed	270	28	○	○
	5		About 0.75% C Quenched & Tempered	300	32	○	○
	6	Low alloy steel	Annealed	180	10	◎	◎
	7		Quenched & Tempered	275	29	◎	◎
	8		Quenched & Tempered	300	32	○	○
	9		Quenched & Tempered	350	38	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15	○
	11		Quenched & Tempered	325	35	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○
	13		Martensitic Quenched & Tempered	240	23	○	○
	14		Austenitic	180	10	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎
	16		Pearlitic (Martensitic)	260	26	○	○
	17	Nodular cast iron	Ferritic	160	3	◎	◎
	18		Pearlitic	250	25	○	○
	19	Malleable cast iron	Ferritic	130		◎	◎
	20		Pearlitic	230	21	○	○
N	21	Aluminum-wrought alloy	Not Curable	60		○	○
	22		Curable Hardened	100		○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○
	24		≤ 12% Si, Curable Hardened	90		○	○
	25		> 12% Si, Not Curable	130		○	○
	26		Cutting Alloys, PB>1%	110		○	○
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90		○	○
	28		CuSn, lead-free copper and electrolytic copper	100		○	○
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.				
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Ni or Co Based Cured	350	38		
	35		Cast	320	34		
	36	Titanium Alloys	Pure Titanium	400 Rm			
	37		Alpha + Beta Alloys Hardened	1050 Rm			
H	38	Hardened steel	Hardened	550	55		
	39		Hardened	630	60		
	40	Chilled Cast Iron	Cast	400	42		
	41	Hardened Cast Iron	Hardened	550	55		

K1143	K1153	K2101	K2111	K2121	K2102	K2112	K21B1
<b>Straight</b>	<b>LH Spiral</b>	<b>Straight</b>	<b>LH Spiral</b>	<b>LH Spiral (Quick Spiral)</b>	<b>Straight</b>	<b>LH Spiral</b>	<b>LH Spiral</b>
D2.0	D2.0	D2.0	D2.0	D4.0	D10.0	D10.0	D2.0
D60.0	D60.0	D20.0	D20.0	D20.0	D50.0	D50.0	D20.0
<b>408</b>	<b>410</b>	<b>412</b>	<b>414</b>	<b>416</b>	<b>417</b>	<b>419</b>	<b>421</b>

Bright




K1143	K1153	K2101	K2111	K2121	K2102	K2112	K21B1	
○	○	◎	◎	○	◎	◎	◎	1
○	○	◎	◎	○	◎	◎	◎	2
		○	○		○	○	○	3
		○	○		○	○	○	4
								5
○	○	◎	◎	○	◎	◎	◎	6 P
		○	○		○	○	○	7
								8
								9
		○	○		○	○	○	10
								11
		○	○		○	○	○	12
		○	○		○	○	○	13 M
		○	○		○	○	○	14
		○	○		○	○	○	15
		○	○		○	○	○	16
		○	○		○	○	○	17 K
		○	○		○	○	○	18
		○	○		○	○	○	19
		○	○		○	○	○	20
○	○	○	○	◎	○	○	○	21
○	○	○	○	◎	○	○	○	22
○	○	○	○	◎	○	○	○	23
○	○	○	○	◎	○	○	○	24
								25 N
○	○	○	○	◎	○	○	○	26
○	○	○	○	◎	○	○	○	27
○	○	○	○	◎	○	○	○	28
								29
								30
								31
								32
								33
								34 S
								35
								36
								37
								38
								39 H
								40
								41

**CARBIDE, NC MACHINE REAMERS - STRAIGHT FLUTES**

- VHM, NC-MASCHINENREIBAHLEN - GERADEGENUTET
- ALÉSOIRS CARBURE MACHINE CN - ENTRÉE DROITE
- ALESATORI A MACCHINA IN MD - ELICA DRIITA

- ▶ Material - Up to Ø12.0 : Solid Carbide  
- Over Ø12.0 : Carbide Head Brazed
- ▶ Straight Flutes, Right Hand Cut
- ▶ Unequal Flute Spacing
- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank : DIN 6535-HA
- ▶ Chamfer Angle - D<3.0 : 15°  
- D≥3.0 : 45°

- ▶ Material - bis Ø12,0 : VHM  
- über Ø12,0 : gelötete VHM-Köpfe
- ▶ geradegenutet, rechtsschneidend
- ▶ Ungleichteilung
- ▶ Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft : DIN 6535-HA
- ▶ Ansnittwinkel - bis Ø3,0 : 15°  
- über Ø3,0 : 45°

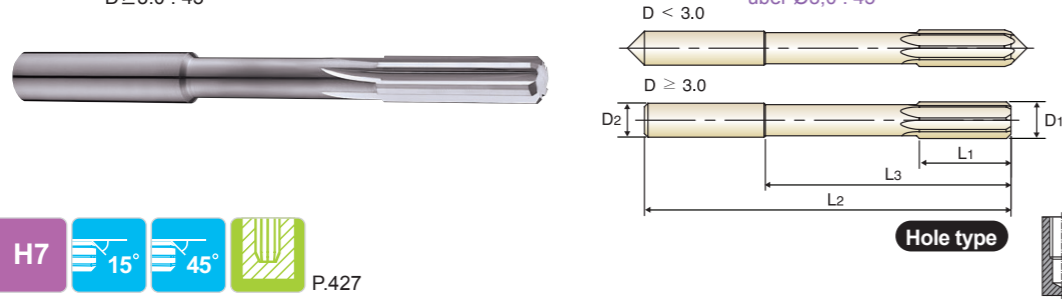

D&lt;3.0 D≥3.0

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K410100200	2.0	4	11	20	50	4
K410100250	2.5	4	14	26	57	4
K410100300	3.0	4	15	31	61	6
K410100350	3.5	4	18	36	70	6
K410100400	4.0	4	19	42	75	6
K410100450	4.5	6	21	46	80	6
K410100500	5.0	6	23	51	86	6
K410100550	5.5	6	26	56	93	6
K410100600	6.0	6	26	56	93	6
K410100650	6.5	8	28	62	101	6
K410100700	7.0	8	31	68	109	6
K410100750	7.5	8	31	68	109	6
K410100800	8.0	8	33	74	117	6
K410100850	8.5	10	33	74	117	6
K410100900	9.0	10	36	80	125	6
K410100950	9.5	10	36	80	125	6
K410101000	10.0	10	38	86	133	6
K410101050	10.5	12	38	86	133	6
K410101100	11.0	12	41	95	142	6
K410101200	12.0	12	44	104	151	6
K410101300	13.0	16	44	104	151	6
K410101400	14.0	16	47	108	160	8
K410101500	15.0	16	50	110	162	8
K410101600	16.0	16	52	118	170	8
K410101700	17.0	20	54	121	175	8
K410101800	18.0	20	56	128	182	8
K410101900	19.0	20	58	129	189	8
K410102000	20.0	20	60	135	195	8

◎ : Excellent ○ : Good



ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	○	○	◎	○	○	◎	○	◎	○	◎	○

**CARBIDE, NC MACHINE REAMERS - LH SPIRAL FLUTES**

- VHM, NC-MASCHINENREIBAHLEN - SPIRALGENUTET mit LINKSDRALL
- ALÉSOIRS CARBURE MACHINE CN - HÉLICE À GAUCHE
- ALESATORI A MACCHINA IN MD - ELICA SINISTRA

- ▶ Material - Up to Ø12.0 : Solid Carbide  
- Over Ø12.0 : Carbide Head Brazed
- ▶ Left Spiral Flutes, Right Hand Cut
- ▶ Unequal Flute Spacing
- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank : DIN 6535-HA
- ▶ Chamfer Angle - D<3.0 : 15°  
- D≥3.0 : 45°

- ▶ Material - bis Ø12,0 : VHM  
- über Ø12,0 : gelötete VHM-Köpfe
- ▶ linksspiralig, rechtsschneidend
- ▶ Ungleichteilung
- ▶ Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft : DIN 6535-HA
- ▶ Ansnittwinkel - bis Ø3,0 : 15°  
- über Ø3,0 : 45°

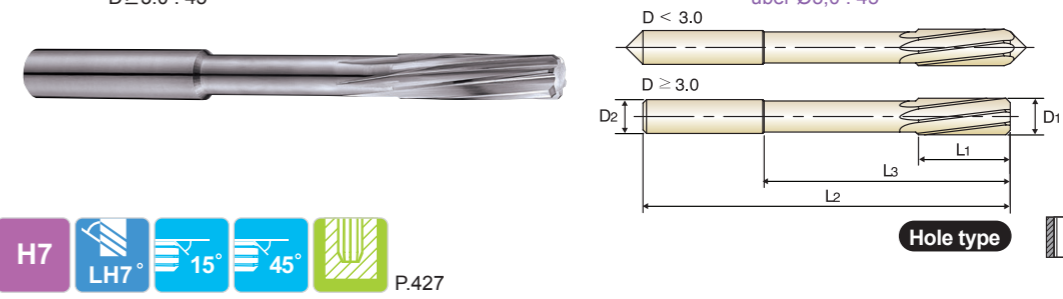

D&lt;3.0 D≥3.0

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K411100200	2.0	4	11	20	50	4
K411100250	2.5	4	14	26	57	4
K411100300	3.0	4	15	31	61	6
K411100350	3.5	4	18	36	70	6
K411100400	4.0	4	19	42	75	6
K411100450	4.5	6	21	46	80	6
K411100500	5.0	6	23	51	86	6
K411100550	5.5	6	26	56	93	6
K411100600	6.0	6	26	56	93	6
K411100650	6.5	8	28	62	101	6
K411100700	7.0	8	31	68	109	6
K411100750	7.5	8	31	68	109	6
K411100800	8.0	8	33	74	117	6
K411100850	8.5	10	33	74	117	6
K411100900	9.0	10	36	80	125	6
K411100950	9.5	10	36	80	125	6
K411101000	10.0	10	38	86	133	6
K411101050	10.5	12	38	86	133	6
K411101100	11.0	12	41	95	142	6
K411101200	12.0	12	44	104	151	6
K411101300	13.0	16	44	104	151	6
K411101400	14.0	16	47	108	160	8
K411101500	15.0	16	50	110	162	8
K411101600	16.0	16	52	118	170	8
K411101700	17.0	20	54	121	175	8
K411101800	18.0	20	56	128	182	8
K411101900	19.0	20	58	129	189	8
K411102000	20.0	20	60	135	195	8

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	○	◎	○	○	◎	○	◎	○	◎	○	◎

**HSS, HAND REAMERS - STRAIGHT FLUTES**

- HSS, HANDREIBAHLEN - GERADEGENUTET
- ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE
- ALESATORI A MANO IN HSS - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter ≈ Nominal Reamer Diameter
- ▶ Straight Flutes / Right Hand Cut
- ▶ Chamfer Angle- tapered
- ▶ Type of center - Up to Ø3.75 : external centers  
- Over Ø3.75 : internal centers

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø = Nomineller Reibahlen-Ø
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel - Konisch
- ▶ Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen  
- über Ø3,75 mm : Zentrierung

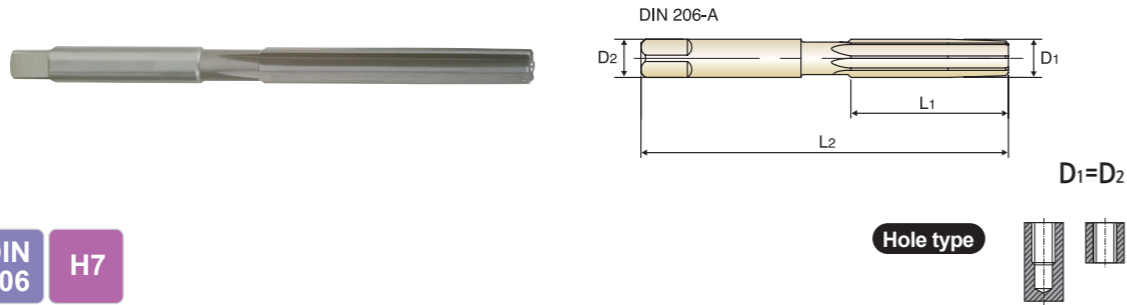

HSS DIN 206 H7

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K114300200	2.0	25	50	4
K114300220	2.2	27	54	4
K114300250	2.5	29	58	4
K114300280	2.8	31	62	4
K114300300	3.0	31	62	6
K114300320	3.2	33	66	6
K114300350	3.5	35	71	6
K114300400	4.0	38	76	6
K114300450	4.5	41	81	6
K114300500	5.0	44	87	6
K114300550	5.5	47	93	6
K114300600	6.0	47	93	6
K114300700	7.0	54	107	6
K114300800	8.0	58	115	6
K114300900	9.0	62	124	6
K114301000	10.0	66	133	6
K114301100	11.0	71	142	6
K114301200	12.0	76	152	6
K114301300	13.0	76	152	6
K114301400	14.0	81	163	8
K114301500	15.0	81	163	8
K114301600	16.0	87	175	8
K114301700	17.0	87	175	8
K114301800	18.0	93	188	8
K114301900	19.0	93	188	8
K114302000	20.0	100	201	8
K114302200	22.0	107	215	8
K114302400	24.0	115	231	8

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○				○															

**HSS, HAND REAMERS - STRAIGHT FLUTES**

- HSS, HANDREIBAHLEN - GERADEGENUTET
- ALÉSOIRS HSS À MAIN - ENTRÉE DROITE
- ALESATORI A MANO IN HSS - ELICA DRITTA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter ≈ Nominal Reamer Diameter
- ▶ Straight Flutes / Right Hand Cut
- ▶ Chamfer Angle- tapered
- ▶ Type of center - Up to Ø3.75 : external centers  
- Over Ø3.75 : internal centers

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø = Nomineller Reibahlen-Ø
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel - Konisch
- ▶ Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen  
- über Ø3,75 mm : Zentrierung

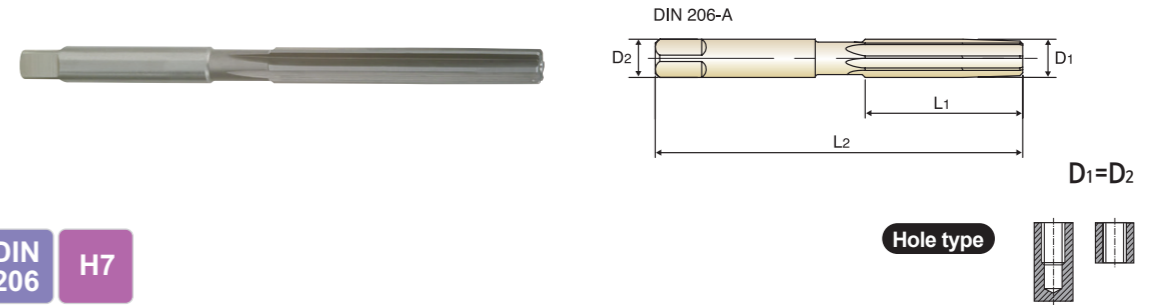

HSS DIN 206 H7

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K114302500	25.0	115	231	8
K114302600	26.0	115	231	8
K114302700	27.0	124	247	10
K114302800	28.0	124	247	10
K114302900	29.0	124	247	10
K114303000	30.0	124	247	10
K114303100	31.0	133	265	10
K114303200	32.0	133	265	10
K114303300	33.0	133	265	10
K114303400	34.0	142	284	10
K114303500	35.0	142	284	10
K114303600	36.0	142	284	10
K114303700	37.0	142	284	10
K114303800	38.0	152	305	10
K114303810	38.1	152	305	10
K114303900	39.0	152	305	10
K114304000	40.0	152	305	10
K114304100	41.0	152	305	12
K114304200	42.0	152	305	12
K114304300	43.0	163	326	12
K114304400	44.0	163	326	12
K114304500	45.0	163	326	12
K114304600	46.0	163	326	12
K114304700	47.0	163	326	12
K114304800	48.0	174	347	12
K114304900	49.0	174	347	12
K114305200	52.0	174	347	12
K114306000	60.0	184	367	12

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○				○															

**HSS, HAND REAMERS - LH SPIRAL FLUTES**

- HSS, HAND REAMERS - LH SPIRAL FLUTES
- ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE
- ALESATORI A MANO IN HSS - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420, H7
- ▶ Shank Diameter ≈ Nominal Reamer Diameter
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - tapered
- ▶ Type of center - Up to Ø3.75 : external centers  
- Over Ø3.75 : internal centers

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø = Nomineller Reibahlen-Ø
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Anschnittwinkel - Konisch
- ▶ Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen  
- über Ø3,75 mm : Zentrierung

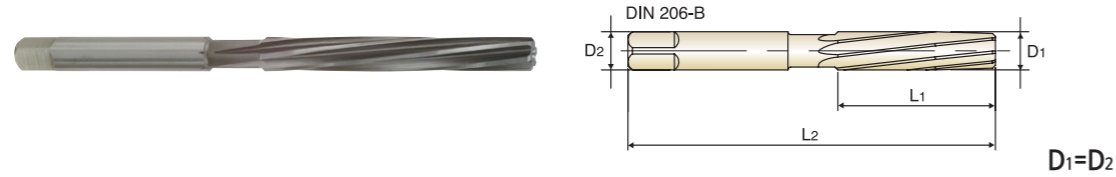

Unit : mm

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K115300200	2.0	25	50	4
K115300220	2.2	27	54	4
K115300250	2.5	29	58	4
K115300280	2.8	31	62	4
K115300300	3.0	31	62	6
K115300320	3.2	33	66	6
K115300350	3.5	35	71	6
K115300400	4.0	38	76	6
K115300450	4.5	41	81	6
K115300500	5.0	44	87	6
K115300550	5.5	47	93	6
K115300600	6.0	47	93	6
K115300700	7.0	54	107	6
K115300800	8.0	58	115	6
K115300900	9.0	62	124	6
K115301000	10.0	66	133	6
K115301100	11.0	71	142	6
K115301200	12.0	76	152	6
K115301300	13.0	76	152	6
K115301400	14.0	81	163	8
K115301500	15.0	81	163	8
K115301600	16.0	87	175	8
K115301700	17.0	87	175	8
K115301800	18.0	93	188	8
K115301900	19.0	93	188	8
K115302000	20.0	100	201	8
K115302200	22.0	107	215	8
K115302400	24.0	115	231	8

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○				○														


ISO	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○		○	○	○														

**HSS, HAND REAMERS - LH SPIRAL FLUTES**

- HSS, HAND REAMERS - LH SPIRAL FLUTES
- ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE
- ALESATORI A MANO IN HSS - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420, H7
- ▶ Shank Diameter ≈ Nominal Reamer Diameter
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - tapered
- ▶ Type of center - Up to Ø3.75 : external centers  
- Over Ø3.75 : internal centers

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø = Nomineller Reibahlen-Ø
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel - Konisch
- ▶ Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen  
- über Ø3,75 mm : Zentrierung

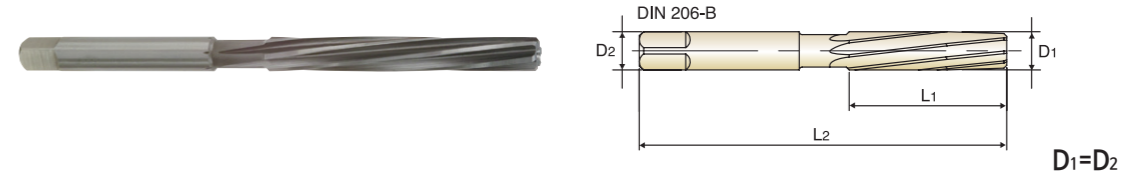

Unit : mm

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K115302500	25.0	115	231	8
K115302600	26.0	115	231	8
K115302700	27.0	124	247	10
K115302800	28.0	124	247	10
K115302900	29.0	124	247	10
K115303000	30.0	124	247	10
K115303100	31.0	133	265	10
K115303200	32.0	133	265	10
K115303300	33.0	133	265	10
K115303400	34.0	142	284	10
K115303500	35.0	142	284	10
K115303600	36.0	142	284	10
K115303700	37.0	142	284	10
K115303800	38.0	152	305	10
K115303810	38.1	152	305	10
K115303900	39.0	152	305	10
K115304000	40.0	152	305	10
K115304100	41.0	152	305	12
K115304200	42.0	152	305	12
K115304300	43.0	163	326	12
K115304400	44.0	163	326	12
K115304500	45.0	163	326	12
K115304600	46.0	163	326	12
K115304700	47.0	163	326	12
K115304800	48.0	174	347	12
K115304900	49.0	174	347	12
K115305200	52.0	174	347	12
K115306000	60.0	184	367	12

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	29	32	38	15	35	15	23	10	10	26	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○				○															


ISO	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○		○	○	○														

**HSS-E, STRAIGHT SHANK CHUCKING REAMERS - STRAIGHT FLUTES**

- HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - GERADEGENUTET
- ALÉSOIRS HSS-E MACHINE DROIT- ENTRÉE DROITE
- ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA DRIITA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ Straight Flute / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel - bis Ø3,75 mm : 15°
- über Ø3,75 mm : 45°

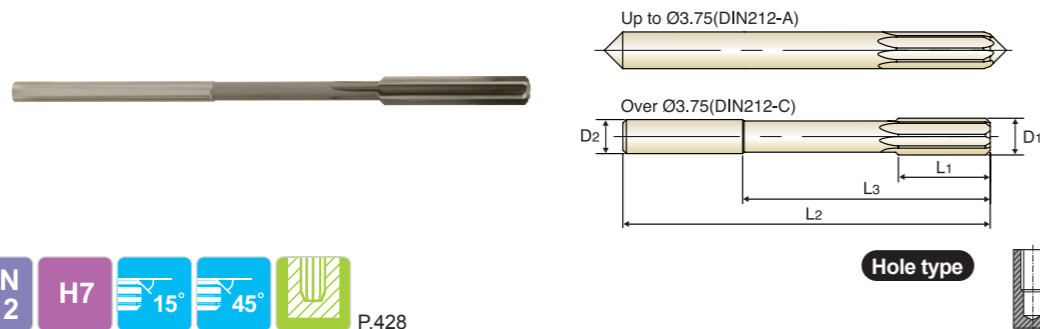

HSS-E DIN 212 H7 15° 45° P.428

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K210100200	2.0	2	11	-	49	4
K210100220	2.2	2.2	12	-	53	4
K210100250	2.5	2.5	14	-	57	4
K210100260	2.6	2.6	14	-	57	4
K210100280	2.8	2.8	15	-	61	4
K210100300	3.0	3	15	-	61	6
K210100310	3.1	3.1	16	-	65	6
K210100320	3.2	3.2	16	-	65	6
K210100350	3.5	3.5	18	-	70	6
K210100360	3.6	3.6	18	-	70	6
K210100370	3.7	3.7	18	-	70	6
K210100400	4.0	4	19	42	75	6
K210100430	4.3	4.5	21	46	80	6
K210100450	4.5	4.5	21	46	80	6
K210100460	4.6	4.5	21	46	80	6
K210100500	5.0	5	23	51	86	6
K210100550	5.5	5.6	26	56	93	6
K210100560	5.6	5.6	26	56	93	6
K210100600	6.0	5.6	26	56	93	6
K210100650	6.5	6.3	28	62	101	6
K210100700	7.0	7.1	31	68	109	6
K210100720	7.2	7.1	31	68	109	6
K210100800	8.0	8	33	74	117	6
K210100830	8.3	8	33	74	117	6
K210100850	8.5	8	33	74	117	6
K210100900	9.0	9	36	80	125	6

▶NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**HSS-E, STRAIGHT SHANK CHUCKING REAMERS - STRAIGHT FLUTES**

- HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - GERADEGENUTET
- ALÉSOIRS HSS-E MACHINE DROIT- ENTRÉE DROITE
- ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA DRIITA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ Straight Flute / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel - bis Ø3,75 mm : 15°
- über Ø3,75 mm : 45°

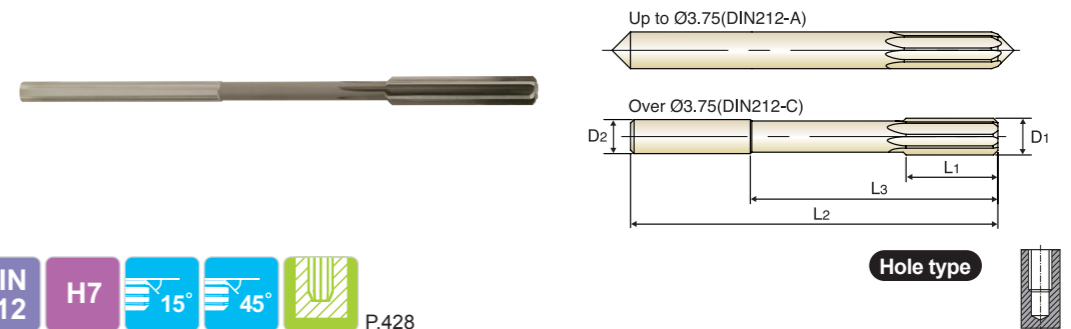

HSS-E DIN 212 H7 15° 45° P.428

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K210100950	9.5	9	36	80	125	6
K210101000	10.0	10	38	86	133	6
K210101050	10.5	10	38	86	133	6
K210101100	11.0	10	41	95	142	6
K210101200	12.0	10	44	104	151	6
K210101300	13.0	10	44	104	151	6
K210101400	14.0	12.5	47	108	160	8
K210101500	15.0	12.5	50	110	162	8
K210101600	16.0	12.5	52	118	170	8
K210101700	17.0	14	54	121	175	8
K210101800	18.0	14	56	128	182	8
K210101900	19.0	16	58	129	189	8
K210102000	20.0	16	60	135	195	8

Unit : mm

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**HSS-E, STRAIGHT SHANK CHUCKING REAMERS - LH SPIRAL FLUTES**

HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - SPIRALGENUTET mit LINKSDRALL  
 ALÉSOIRS HSS-E MACHINE DROIT- HÉLICE À GAUCHE  
 ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°  
- Over Ø3.75 : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Anschnittwinkel - bis Ø3,75 mm : 15°  
- über Ø3,75 mm : 45°

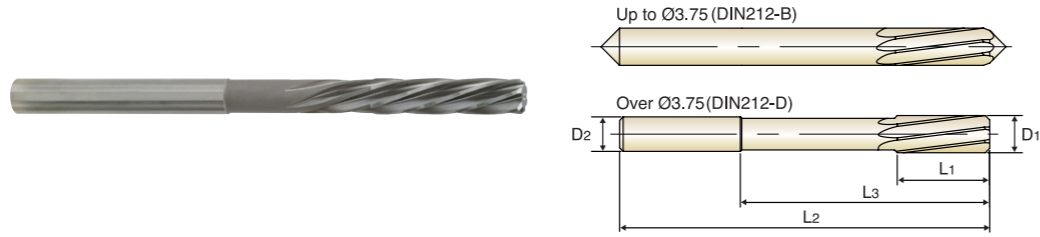

HSS-E DIN 212 H7 LH7° 15° 45° P.428  
 up to Ø3.75 over Ø3.75



EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K211100200	2.0	2	11	-	49	4
K211100220	2.2	2.2	12	-	53	4
K211100250	2.5	2.5	14	-	57	4
K211100260	2.6	2.6	14	-	57	4
K211100280	2.8	2.8	15	-	61	4
K211100300	3.0	3	15	-	61	6
K211100310	3.1	3.1	16	-	65	6
K211100320	3.2	3.2	16	-	65	6
K211100350	3.5	3.5	18	-	70	6
K211100360	3.6	3.6	18	-	70	6
K211100370	3.7	3.7	18	-	70	6
K211100400	4.0	4	19	42	75	6
K211100430	4.3	4.5	21	46	80	6
K211100450	4.5	4.5	21	46	80	6
K211100460	4.6	4.5	21	46	80	6
K211100500	5.0	5	23	51	86	6
K211100550	5.5	5.6	26	56	93	6
K211100560	5.6	5.6	26	56	93	6
K211100600	6.0	5.6	26	56	93	6
K211100650	6.5	6.3	28	62	101	6
K211100700	7.0	7.1	31	68	109	6
K211100720	7.2	7.1	31	68	109	6
K211100800	8.0	8	33	74	117	6
K211100830	8.3	8	33	74	117	6


▶NEXT PAGE

**HSS-E, STRAIGHT SHANK CHUCKING REAMERS - LH SPIRAL FLUTES**

HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - SPIRALGENUTET mit LINKSDRALL  
 ALÉSOIRS HSS-E MACHINE DROIT- HÉLICE À GAUCHE  
 ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°  
- Over Ø3.75 : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Anschnittwinkel - bis Ø3,75 mm : 15°  
- über Ø3,75 mm : 45°

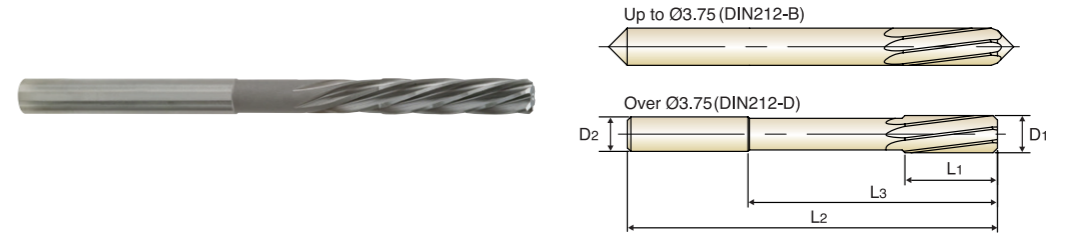

HSS-E DIN 212 H7 LH7° 15° 45° P.428  
 up to Ø3.75 over Ø3.75



EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K211100850	8.5	8	33	74	117	6
K211100900	9.0	9	36	80	125	6
K211100950	9.5	9	36	80	125	6
K211101000	10.0	10	38	86	133	6
K211101050	10.5	10	38	86	133	6
K211101100	11.0	10	41	95	142	6
K211101200	12.0	10	44	104	151	6
K211101300	13.0	10	44	104	151	6
K211101400	14.0	12.5	47	108	160	8
K211101500	15.0	12.5	50	110	162	8
K211101600	16.0	12.5	52	118	170	8
K211101700	17.0	14	54	121	175	8
K211101800	18.0	14	56	128	182	8
K211101900	19.0	16	58	129	189	8
K211102000	20.0	16	60	135	195	8

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**HSS-E, STRAIGHT SHANK CHUCKING REAMERS - LH SPIRAL FLUTES (QUICK SPIRAL)**

HSS-E, MASCHINEN - SCHÄLREIBAHLE mit ZYLINDERSCHAFT - SPIRALGENUTET mit LINKSDRAL  
 ALÉSOIRS HSS-E MACHINE DROIT- HÉLICE À GAUCHE (HÉLICE RAPIDE)  
 ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA RAPIDA, SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ Chamfer Angle - tapered
- ▶ LH High Spiral Flutes / Right Hand Cut

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Ansnittwinkel - Konisch
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend



HSS-E DIN 212 H7 LH45° FORM E P.429



Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K212100400	4.0	4	19	42	75	3
K212100450	4.5	4.5	21	46	80	3
K212100500	5.0	5	23	51	86	3
K212100550	5.5	5.6	26	56	93	3
K212100600	6.0	5.6	26	56	93	3
K212100650	6.5	6.3	28	62	101	3
K212100700	7.0	7.1	31	68	109	3
K212100800	8.0	8	33	74	117	3
K212100850	8.5	8	33	74	117	3
K212100900	9.0	9	36	80	125	3
K212100950	9.5	9	36	80	125	3
K212101000	10.0	10	38	86	133	3
K212101100	11.0	10	41	95	142	3
K212101200	12.0	10	44	104	151	3
K212101300	13.0	10	44	104	151	3
K212101400	14.0	12.5	47	108	160	4
K212101500	15.0	12.5	50	110	162	4
K212101600	16.0	12.5	52	118	170	4
K212101700	17.0	14	54	121	175	4
K212101800	18.0	14	56	128	182	4
K212101900	19.0	16	58	129	189	4
K212102000	20.0	16	60	135	195	4

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○				○														

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎		◎	◎	◎													

**HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - STRAIGHT FLUTES**

HSS-E, MASCHINENREIBAHLE mit MK - GERADEGENUTET  
 ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - ENTRÉE DROITE  
 ALESATORI IN HSS-E, ATTACCO CONICO - TAGLIANTI DRITTI

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Straight Flute / Right Hand Cut
- ▶ Chamfer Angle : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Ansnittwinkel : 45°



HSS-E DIN 208 H7 45° P.428



Unit : mm

EDP No.	Reamer Diameter	No. of Morse Taper	Cutting Length	Overall Length	No. of Flute
	D1		L1	L2	
K210201000	10.0	1	38	168	6
K210201100	11.0	1	41	175	6
K210201200	12.0	1	44	182	6
K210201300	13.0	1	44	182	6
K210201400	14.0	1	47	189	8
K210201500	15.0	2	50	204	8
K210201600	16.0	2	52	210	8
K210201700	17.0	2	54	214	8
K210201800	18.0	2	56	219	8
K210201900	19.0	2	58	223	8
K210202000	20.0	2	60	228	8
K210202100	21.0	2	62	232	8
K210202200	22.0	2	64	237	8
K210202300	23.0	2	66	241	8
K210202400	24.0	3	68	268	8
K210202500	25.0	3	68	268	8
K210202600	26.0	3	70	273	8
K210202700	27.0	3	71	277	10
K210202800	28.0	3	71	277	10
K210202900	29.0	3	73	281	10
K210203000	30.0	3	73	281	10
K210203100	31.0	3	75	285	10
K210203200	32.0	4	77	317	10
K210203400	34.0	4	78	321	10
K210203500	35.0	4	78	321	10
K210203600	36.0	4	79	325	10

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○		◎	○													

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○		○	○	○													

**HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - STRAIGHT FLUTES**

- HSS-E, MASCHINENREIBAHLE mit MK - GERADEGENUTET
- ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - ENTRÉE DROITE
- ALESATORI IN HSS-E, ATTACCO CONICO - TAGLIENTI DRITTI

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Straight Flute / Right Hand Cut
- ▶ Chamfer Angle : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel : 45°



HSS-E DIN 208 H7 45° P.428

Hole type

Unit : mm

EDP No.	Reamer Diameter D1	No. of Morse Taper	Cutting Length	Overall Length	No. of Flute
			L1	L2	
K210203800	38.0	4	81	329	10
K210204000	40.0	4	81	329	10
K210204100	41.0	4	82	333	12
K210204200	42.0	4	82	333	12
K210204300	43.0	4	83	336	12
K210204400	44.0	4	83	336	12
K210204500	45.0	4	83	336	12
K210204600	46.0	4	84	340	12
K210204700	47.0	4	84	340	12
K210204800	48.0	4	86	344	12
K210205000	50.0	4	86	344	12

**HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - LH SPIRAL FLUTES**

- HSS-E, MASCHINENREIBAHLE mit MK - SPIRALGENUTET mit LINKSDRALL
- ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - HÉLICE À GAUCHE
- ALESATORI IN HSS-E, ATTACCO CONICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Anschnittwinkel : 45°



HSS-E DIN 208 H7 LH7° 45° P.428

Hole type

Unit : mm

EDP No.	Reamer Diameter D1	No. of Morse Taper	Cutting Length	Overall Length	No. of Flute
			L1	L2	
K211201000	10.0	1	38	168	6
K211201100	11.0	1	41	175	6
K211201200	12.0	1	44	182	6
K211201300	13.0	1	44	182	6
K211201400	14.0	1	47	189	8
K211201500	15.0	2	50	204	8
K211201600	16.0	2	52	210	8
K211201700	17.0	2	54	214	8
K211201800	18.0	2	56	219	8
K211201900	19.0	2	58	223	8
K211202000	20.0	2	60	228	8
K211202100	21.0	2	62	232	8
K211202200	22.0	2	64	237	8
K211202300	23.0	2	66	241	8
K211202400	24.0	3	68	268	8
K211202500	25.0	3	68	268	8
K211202600	26.0	3	70	273	8
K211202700	27.0	3	71	277	10
K211202800	28.0	3	71	277	10
K211202900	29.0	3	73	281	10
K211203000	30.0	3	73	281	10
K211203100	31.0	3	75	285	10
K211203200	32.0	4	77	317	10
K211203400	34.0	4	78	321	10
K211203500	35.0	4	78	321	10
K211203600	36.0	4	79	325	10

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○														

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○														

**HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - LH SPIRAL FLUTES**

- HSS-E, MASCHINENREIBAHLE mit MK - SPIRALGENUTET mit LINKSDRALL
- ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - HÉLICE À GAUCHE
- ALESATORI IN HSS-E, ATTACCO CONICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Anschnittwinkel : 45°



HSS-E DIN 208 H7 LH7° 45° P.428



Unit : mm


EDP No.	Reamer Diameter D1	No. of Morse Taper	Cutting Length		No. of Flute
			L1	L2	
K211203800	38.0	4	81	329	10
K211204000	40.0	4	81	329	10
K211204100	41.0	4	82	333	12
K211204200	42.0	4	82	333	12
K211204300	43.0	4	83	336	12
K211204400	44.0	4	83	336	12
K211204500	45.0	4	83	336	12
K211204600	46.0	4	84	340	12
K211204700	47.0	4	84	340	12
K211204800	48.0	4	86	344	12
K211205000	50.0	4	86	344	12

**HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø**

- HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø
- ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE
- ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- ▶ O.D. Tolerances  
Whole-number Ø and 1/10 size : DIN 1420 for H7  
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm  
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°  
- Over Ø3.75 : 45°

- ▶ Ø Toleranzen:  
ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7  
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm  
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsschneidend
- ▶ Anschnittwinkel - bis Ø3,75 : 15°  
- über Ø3,75 : 45°

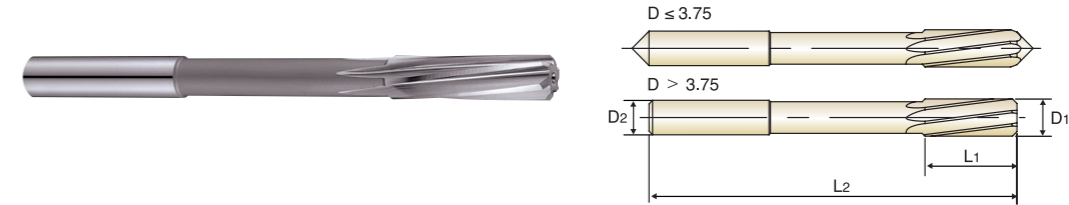

HSS-E H7 LH7° 15° 45° P.428

up to Ø3.75 over Ø3.75



Unit : mm

EDP No.	Reamer Diameter D1	Shank Diameter D2	Flute Length		Overall Length L2
			L1	L2	
K21B100200	2.0	2	11	49	
K21B100201	2.01	2	11	49	
K21B100202	2.02	2	11	49	
K21B100203	2.03	2	11	49	
K21B100210	2.1	2	11	49	
K21B100220	2.2	3	12	53	
K21B100230	2.3	3	12	53	
K21B100240	2.4	3	14	57	
K21B100247	2.47	3	14	57	
K21B100248	2.48	3	14	57	
K21B100249	2.49	3	14	57	
K21B100250	2.5	3	14	57	
K21B100251	2.51	3	14	57	
K21B100252	2.52	3	14	57	
K21B100253	2.53	3	14	57	
K21B100260	2.6	3	14	57	
K21B100270	2.7	3	15	61	
K21B100280	2.8	3	15	61	
K21B100290	2.9	3	15	61	
K21B100297	2.97	3	15	61	
K21B100298	2.98	3	15	61	
K21B100299	2.99	3	15	61	
K21B100300	3.0	3	15	61	
K21B100301	3.01	4	16	65	

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72	75	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○														

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72	75	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	



ISO	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○														

**HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø**

HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø  
 ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE  
 ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- O.D. Tolerances  
 Whole-number Ø and 1/10 size : DIN 1420 for H7  
 1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm  
 from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- Shank Diameter Tolerances : h6
- LH Spiral Flutes / Right Hand Cut
- Chamfer Angle - Up to Ø3.75 : 15°  
 - Over Ø3.75 : 45°

- Ø Toleranzen:  
 ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7  
 1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm  
 von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- Schaft-Durchmesser Toleranzen : h6
- linksspiralig/ rechtsscheidend
- Ansnittwinkel - bis Ø3,75 : 15°  
 - über Ø3,75 : 45°

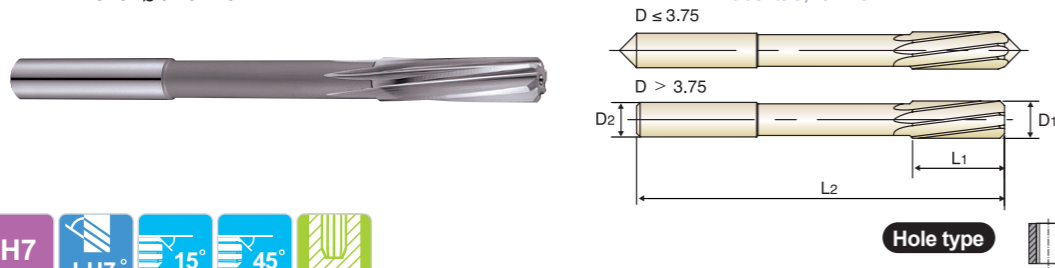

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100302	3.02	4	16	65
K21B100303	3.03	4	16	65
K21B100310	3.1	4	16	65
K21B100320	3.2	4	16	65
K21B100330	3.3	4	16	65
K21B100340	3.4	4	18	70
K21B100350	3.5	4	18	70
K21B100360	3.6	4	18	70
K21B100370	3.7	4	18	70
K21B100380	3.8	4	19	75
K21B100390	3.9	4	19	75
K21B100397	3.97	4	19	75
K21B100398	3.98	4	19	75
K21B100399	3.99	4	19	75
K21B100400	4.0	4	19	75
K21B100401	4.01	4	19	75
K21B100402	4.02	4	19	75
K21B100403	4.03	4	19	75
K21B100410	4.1	4	19	75
K21B100420	4.2	4	19	75
K21B100430	4.3	5	21	80
K21B100440	4.4	5	21	80
K21B100450	4.5	5	21	80
K21B100460	4.6	5	21	80



►NEXT PAGE

**HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø**

HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø  
 ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE  
 ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- O.D. Tolerances  
 Whole-number Ø and 1/10 size : DIN 1420 for H7  
 1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm  
 from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- Shank Diameter Tolerances : h6
- LH Spiral Flutes / Right Hand Cut
- Chamfer Angle - Up to Ø3.75 : 15°  
 - Over Ø3.75 : 45°

- Ø Toleranzen:  
 ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7  
 1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm  
 von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- Schaft-Durchmesser Toleranzen : h6
- linksspiralig/ rechtsscheidend
- Ansnittwinkel - bis Ø3,75 : 15°  
 - über Ø3,75 : 45°

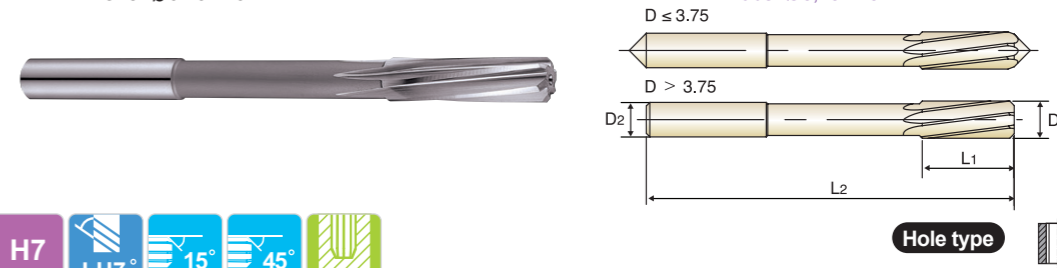

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100470	4.7	5	21	80
K21B100480	4.8	5	23	86
K21B100490	4.9	5	23	86
K21B100497	4.97	5	23	86
K21B100498	4.98	5	23	86
K21B100499	4.99	5	23	86
K21B100500	5.0	5	23	86
K21B100501	5.01	5	23	86
K21B100502	5.02	5	23	86
K21B100503	5.03	5	23	86
K21B100510	5.1	5	23	86
K21B100520	5.2	5	23	86
K21B100530	5.3	5	23	86
K21B100540	5.4	6	26	93
K21B100550	5.5	6	26	93
K21B100560	5.6	6	26	93
K21B100570	5.7	6	26	93
K21B100580	5.8	6	26	93
K21B100590	5.9	6	26	93
K21B100597	5.97	6	26	93
K21B100598	5.98	6	26	93
K21B100599	5.99	6	26	93
K21B100600	6.0	6	26	93
K21B100601	6.01	6	28	101

►NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○

**HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø**

HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø  
 ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE  
 ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- O.D. Tolerances  
 Whole-number Ø and 1/10 size : DIN 1420 for H7  
 1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm  
 from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- Shank Diameter Tolerances : h6  
 ► LH Spiral Flutes / Right Hand Cut  
 ► Chamfer Angle - Up to Ø3.75 : 15°  
 - Over Ø3.75 : 45°

- Ø Toleranzen:  
 ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7  
 1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm  
 von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- Schaft-Durchmesser Toleranzen : h6  
 ► linksspiralig/ rechtsscheidend  
 ► Ansnittwinkel - bis Ø3,75 : 15°  
 - über Ø3,75 : 45°

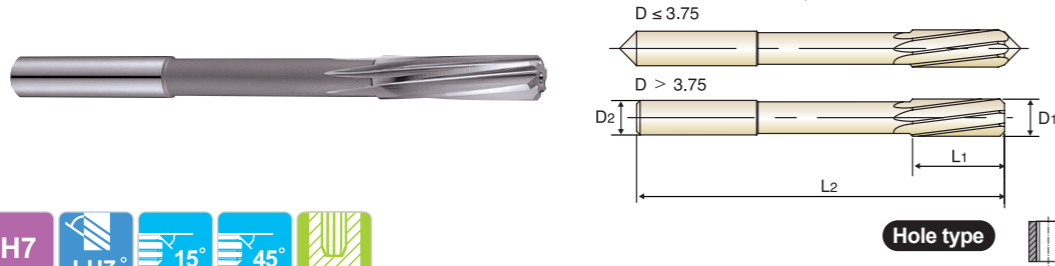

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100602	6.02	6	28	101
K21B100603	6.03	6	28	101
K21B100610	6.1	6	28	101
K21B100620	6.2	6	28	101
K21B100630	6.3	6	28	101
K21B100640	6.4	6	28	101
K21B100650	6.5	6	28	101
K21B100660	6.6	6	28	101
K21B100670	6.7	6	28	101
K21B100680	6.8	8	31	109
K21B100690	6.9	8	31	109
K21B100700	7.0	8	31	109
K21B100710	7.1	8	31	109
K21B100720	7.2	8	31	109
K21B100730	7.3	8	31	109
K21B100740	7.4	8	31	109
K21B100750	7.5	8	31	109
K21B100760	7.6	8	33	117
K21B100770	7.7	8	33	117
K21B100780	7.8	8	33	117
K21B100790	7.9	8	33	117
K21B100797	7.97	8	33	117
K21B100798	7.98	8	33	117
K21B100799	7.99	8	33	117



►NEXT PAGE

**HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø**

HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø  
 ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE  
 ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- O.D. Tolerances  
 Whole-number Ø and 1/10 size : DIN 1420 for H7  
 1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm  
 from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- Shank Diameter Tolerances : h6  
 ► LH Spiral Flutes / Right Hand Cut  
 ► Chamfer Angle - Up to Ø3.75 : 15°  
 - Over Ø3.75 : 45°

- Ø Toleranzen:  
 ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7  
 1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm  
 von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- Schaft-Durchmesser Toleranzen : h6  
 ► linksspiralig/ rechtsscheidend  
 ► Ansnittwinkel - bis Ø3,75 : 15°  
 - über Ø3,75 : 45°

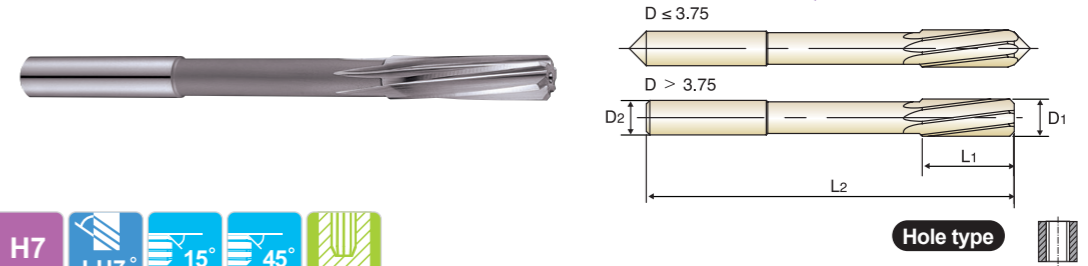

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100800	8.0	8	33	117
K21B100801	8.01	8	33	117
K21B100802	8.02	8	33	117
K21B100803	8.03	8	33	117
K21B100810	8.1	8	33	117
K21B100820	8.2	8	33	117
K21B100830	8.3	8	33	117
K21B100840	8.4	8	33	117
K21B100850	8.5	8	33	117
K21B100860	8.6	10	36	125
K21B100870	8.7	10	36	125
K21B100880	8.8	10	36	125
K21B100890	8.9	10	36	125
K21B100900	9.0	10	36	125
K21B100901	9.01	10	36	125
K21B100902	9.02	10	36	125
K21B100903	9.03	10	36	125
K21B100910	9.1	10	36	125
K21B100920	9.2	10	36	125
K21B100930	9.3	10	36	125
K21B100940	9.4	10	36	125
K21B100950	9.5	10	36	125
K21B100960	9.6	10	38	133
K21B100970	9.7	10	38	133

►NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø**

- HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø
- ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE
- ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- ▶ O.D. Tolerances  
 Whole-number Ø and 1/10 size : DIN 1420 for H7  
 1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm  
 from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°  
 - Over Ø3.75 : 45°

- ▶ Ø Toleranzen:  
 ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7  
 1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm  
 von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Ansnittwinkel - bis Ø3,75 : 15°  
 - über Ø3,75 : 45°

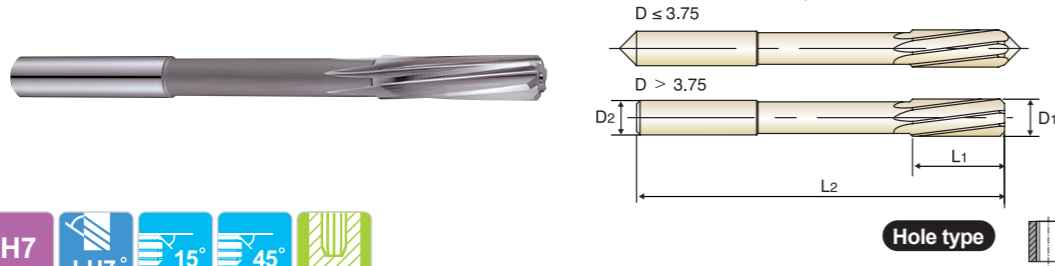

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100980	9.8	10	38	133
K21B100990	9.9	10	38	133
K21B100997	9.97	10	38	133
K21B100998	9.98	10	38	133
K21B100999	9.99	10	38	133
K21B101000	10.0	10	38	133
K21B101001	10.01	10	38	133
K21B101002	10.02	10	38	133
K21B101003	10.03	10	38	133
K21B101100	11.0	10	41	142
K21B101197	11.97	10	41	151
K21B101198	11.98	10	41	151
K21B101199	11.99	10	41	151
K21B101200	12.0	10	44	151
K21B101201	12.01	10	44	151
K21B101202	12.02	10	44	151
K21B101203	12.03	10	44	151
K21B101300	13.0	10	44	151
K21B101400	14.0	14	47	160
K21B101500	15.0	14	50	162
K21B101600	16.0	14	52	170
K21B101700	17.0	14	54	175
K21B101800	18.0	14	56	182
K21B101900	19.0	16	58	189
K21B102000	20.0	16	60	195

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○													

**K4101, K4111** SERIES CARBIDE, NC MACHINE REAMERS

 RPM = rev./min.  
 FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Feed(mm/rev)										
				2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0		
P	1	Non-alloy steel	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	2		17	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	3		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	4		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	5		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	6	Low alloy steel	17	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	7		14	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	8		14	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	9													
	10	High alloyed steel, and tool steel	13	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	11													
M	12	Stainless steel	8	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	13		7	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	14		6	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
K	15	Grey cast iron	20	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	16		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	17	Nodular cast iron	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	18		13	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	19	Malleable cast iron	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	20		13	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
N	21	Aluminum-wrought alloy	30	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	22		30	0.1-0.130	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	23	Aluminum-cast, alloyed	30	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	24		25	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	25													
	26	Copper and Copper Alloys (Bronze / Brass)	25	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	27		22	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	28		23	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	29	Non Metallic Materials												
	30													
S	31	Heat Resistant Super Alloys												
	32													
	33													
	34													
	35													
	36		Titanium Alloys											
	37													
H	38	Hardened steel												
	39													
	40		Chilled Cast Iron											
	41		Hardened Cast Iron											

